

Thank you for purchasing a Shakespeare antenna product. Shakespeare works hard to build reliability and durability into all of its products. Customer comments are welcome.

Before installing, please study the diagram and check parts supplied against those listed.

IMPORTANT! Please read all instructions before installing.

The Mariner™ Style 8900 is a VHF Marine antenna of 8' overall length. The one-section, 6dB antenna has a stainless steel ferrule and a 20-foot low-loss coax cable.

Tools required: Soldering iron (40-watt min., 75-watt max.), resin core solder, pocket knife, wire cutters.

Installation Instructions

Choose a mounting location that is as high as feasible, as free as possible from obstructions, and as far as possible from other antennas and strong sources of RF. The recommended mount is a stainless steel ratchet mount (sold separately).

1. Mount the antenna according to the directions included with the mount you choose.
2. Route the cable to your transceiver, keeping it as far as possible from other electrical equipment and cables. Any excess cable should be rolled in a coil of at least 8" diameter and stowed in an out-of-the-way place away from other electrical cabling.
3. Attach the Centerpin® PL-259 connector (supplied) according to the instructions packed with the connector.

Cleaning Instructions

To clean the antenna, use mild dishwashing liquid (one that is not harsh to the hands and *without* ammonia) in lukewarm water.

WARNING: Do not let paint solvents, cleaning solvents, or adhesive caulking come in contact with the antenna. Chemicals in these materials might destroy the finish.

Supplied Parts

- 1 Antenna assembly
- 1 Centerpin® PL-259 Connector with instruction sheet
- 1 Grommet plug (see Tech Tips)


One-section Antenna

Tech Tips

This antenna will read "short circuit" when tested with an ohm meter or continuity tester.

The 50-ohm coaxial cable should remain at least 3 feet in length, measured from the point where the cable exits the antenna.

For installations where the cable exits through the bottom center of the antenna's ferrule, replace the grommet at the exit hole in the ferrule with the supplied Grommet Plug.

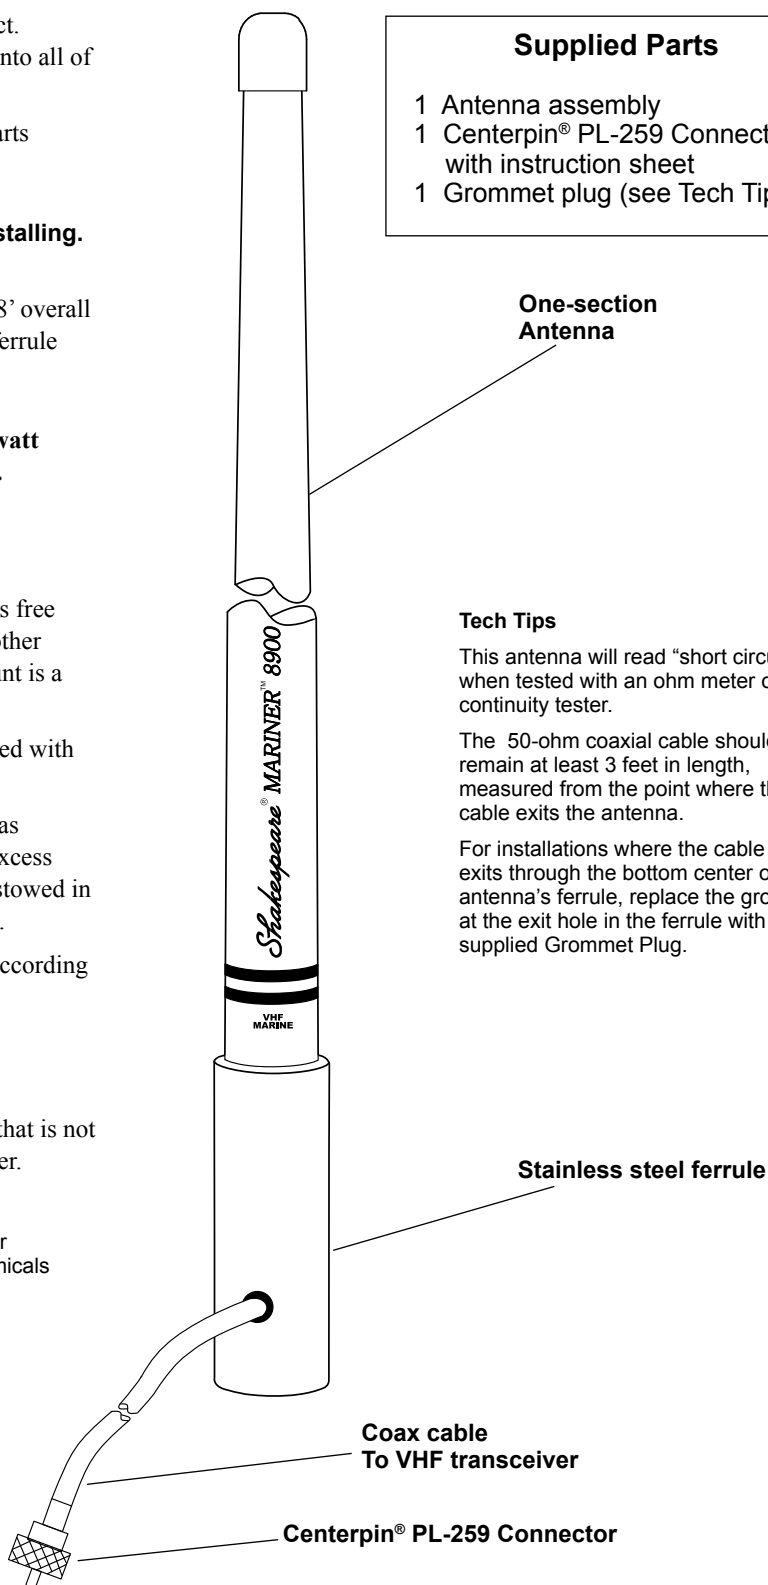

Shakespeare Electronic Products Group

U.S. Operations: 6111 Shakespeare Rd. · Columbia, SC 29223 · 803-227-1590 · Fax: 803-419-3099 · www.shakespeare-marine.com

U.K. Operations: Enterprise Way, Fleetwood, Lancashire, FY7 8RY, England · +44 (0) 1253 858787 · Fax: +44 (0) 1253-859595