INITIAL ARMING INSTRUCTIONS:

MODELS 3042AC, 3042AC-Z, 2042AC, 2042AC-Z, 2042AC-H, 2042AC-WHZ, 2042A95, 2042A95-Z, 2042WV-A95

24 Gram CO_2 Cylinder
33 Gram CO_2 Cylinder

*Note: This inflatable PFD is shipped with the CO_2 cylinder **UNINSTALLED**. The user **must** install this part before the PFD is ready for use.*



Step 1: Open the protective cover to access the inflator mechanism.
With only Hook and Loop: Separate the Hook and Loop to access the inflator.
With Burst Zipper: Open one of the tabs with hook and loop. Start to separate the zipper by pulling the yellow teeth apart. Completely separate the whole zipper and disconnect the ends.



IMPORTANT! A Yellow bobbin comes pre-installed inside the cap.

Step 2: Check that the face of the CO_2 cylinder has not been pierced.

IMPORTANT! Do not install if the cylinder has been pierced.

Step 3: Install CO_2 cylinder by engaging the cylinder threads with the inflator threads. Turn cylinder clockwise until a firm seal is achieved**.**

WARNING: PFD WILL ONLY INFLATE IF CO_2 CYLINDER IS TURNED TO FULL STOP.

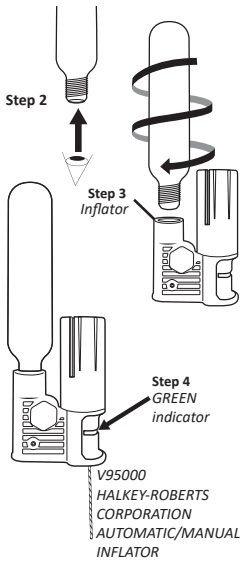

Step 4: Check to be sure the service indicator is green. If green, it is armed properly and ready to use. If red, STOP and service the PFD.
Step 5: Close the protective cover.
For PFDs with only hook and loop: Match and secure the hook and loop.
For PFDs with a burst zipper: First slide the zipper slider around to the zipper start on the mechanism side. Connect the zipper. As you zip up the cover secure the hook and loop tabs as the slider passes them. Once zipped, tuck the zipper ends into the cover.





Refer to the “Repack” instructions in the “Owner’s Manual”. Make sure that the Jerk to Inflate handle is placed correctly outside of the closed cover.
Step 6: Carefully read all information and follow all instructions in the “Owner’s Manual” and “Think Safe” booklet before using this PFD. For more information visit www.onyxoutdoor.com

Absolute Outdoor of America, LLC Sauk Rapids, MN 877-252-2056
www.onyxoutdoor.com